


enki-carbon									
Type	Flow rate (m <sup>3</sup> /h)			L	W	H	Connection	Weight	Price
	min	max	Backwash	mm	mm	mm	mm	kg	Euro
ICF 20-155	19	37	56	1.800	2.050	3.500	100	3.550	
ICF 20-170	22	45	67	1.935	2.240	3.620	100	4.140	
ICF 20-190	28	56	84	2.135	2.450	3.700	100	4.950	
ICF 20-215	36	72	107	2.385	2.700	3.850	100	6.200	
ICF 20-230	41	82	123	2.535	2.900	3.900	125	7.010	
ICF 20-245	47	93	140	2.675	3.000	3.980	125	8.330	
ICF 20-255	50	101	151	2.810	3.100	4.070	125	8.820	
ICF 20-270	56	113	169	2.935	3.370	4.200	150	9.790	
ICF 20-285	63	126	189	3.100	3.520	4.270	150	10.730	
ICF 20-300	70	139	209	3.260	3.680	4.400	150	11.830	
ICF 20-320	79	158	238	3.440	4.000	4.470	200	14.140	
ICF 20-335	87	174	251	3.610	4.180	4.600	200	15.600	
ICF 20-350	95	190	285	3.750	4.340	4.720	200	16.730	
ICF 20-365	103	207	310	3.900	4.460	4.820	200	17.930	
ICF 20-380	112	224	336	4.060	4.620	4.950	200	19.270	
ICF 20-400	124	248	372	4.260	5.035	5.200	250	22.440	

**Standard Features**

- Operation Pressure** : 6 bar
- Operation Temp.** : 40 °C
- Material** : Carbon Steel
- Nozzle** : PP
- Media** : Gravel+Sand+A Carbon
- Surface Protection** : Sa 2.5 Sand Blasting+ Epoxy coating
- Design** : AD/PED
- Valve Type** : Butterfly
- Price** : Tank + Valve + Media + Front Pipe

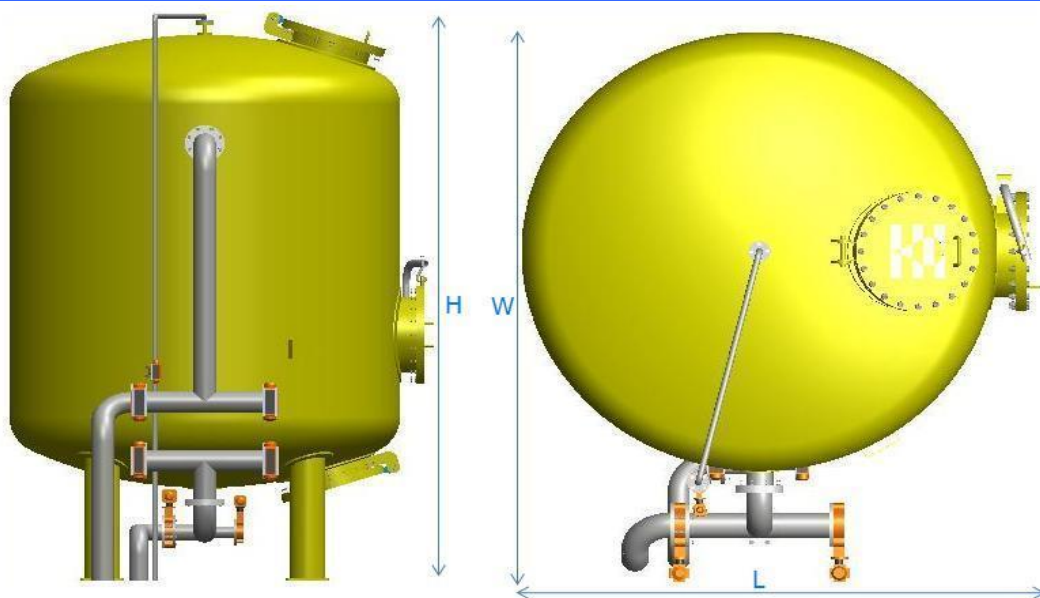

enki reserves the right to change the specifications referred to in this table at any time, without prior notice